

洗砂机系列 Sand Washing Machine

XL洗砂机采用国内外先进技术，结合国内砂石行业实际情况研制生产，配合制砂机使用的高效洗砂设备，它具有洗净度高，结构合理，处理量大，功率消耗少，细砂流失少，故障低等特点。

XS/XL两种型号产品专为砂石，石英砂等的洗选，分级，脱水而优化设计，各具特色。并可配合使用，为各种情况的用户提供准确、灵活的解决方案。

With adopting advanced domestic and foreign technology, integrating with the stone and sand industries' real conditions, the XL sand washing machine has unique features: such as high washing performance, reasonable structure, high processing capacity, low power consumption, low fine sand drain, and low failure.

XS and XL series of the sand washing machines are designed especially for cleaning, classifying and dehydrating of various kind of stone sand as well as quartz sand. Both of them have unique features. They can be cooperated in use to provide exact and flexible solutions for clients of different requirements.



XL Series




性能特点:

- ✓ 该洗砂机结构简单，叶轮传动轴承装置与水和受水物料隔离，大大避免了轴承因浸水、砂和污染物导致损坏的现象发生；
- ✓ 该机用于砂石场洗砂时与传统的螺旋洗砂机相比有明显优势如下：
 - I. 中细砂和石粉流失极少，所洗建筑砂级配和细度模数达到标准要求；
 - II. 该机除筛网外，几乎无易损件；
 - III. 使用寿命长，长期不用维修。

Structural features:

- ✓ The sand washing machine has simple structure, the impeller drive bearing plant is isolated with water and material with water, greatly avoiding the phenomenon that bearing is damaged because of being soaked in the water, sand and pollutants;
- ✓ When the machine is used to wash sand in gravel pits, it has obvious advantages compared with the traditional spiral sand washing machine:
 - I. Less wastage rate of medium fine sand and stone powder, the washed building sand gradation and fineness modulus meet standards;
 - II. The machine almost has no wearing parts except the screen;
 - III. It has long service life and long-term without maintenance.

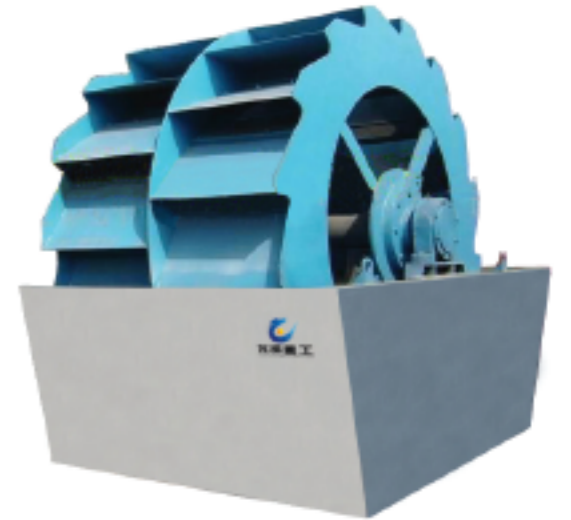

XS Series



规格与性能参数表 Specifications

型号 Model	螺旋数量 Number of Screw	螺旋直径 Screw Diameter (mm)	水槽长度 Tank Length (mm)	入选粒度 Feed Size (mm)	处理能力 Capacity (t/h)	螺旋转速 Rev of Screw (r/min)	电机功率 Motor Power (kw)	耗水量 Water Consumption (t/h)	重量 Weight (t)	外形尺寸 (L x W x H) Overall Dimensions (mm)
XL915	1	915	7585	≤10	100	21	11	10-80	6.2	8420x2810x3960
2XL915	2	915	7585	≤10	200	21	11x2	20-160	11.5	8420x3970x3960
XL1115	1	1115	9750	≤10	175	17	18.5	20-150	10.9	10700x3950x4860
2XL-1115	2	1115	9750	≤10	350	17	18.5x2	40-300	17.8	10700x5260x4860

数据如有改动恕不另行通知
The data is subject to variation without notice.

规格与性能参数表 Specifications

型号 Model	转轮直径 Impeller Diameter (mm)	入选粒度 Feed Size (mm)	生产能力 Capacity (t/h)	功率 Power (kw)	外形尺寸 (L x W x H) Overall Dimensions (mm)	重量 Weight (t)
XS2610	2600	≤10	50	7.5	3320x2125x2670	2680
XS3016	3000	≤10	80	15.0	3810x2686x3085	3260

数据如有改动恕不另行通知
The data is subject to variation without notice.